

JOB REFERENCE _____ /s/ _____

SUBMITTAL DATA:

Qty	Platform/Sensor	Cable Length	Display Increments
		FT	
		M	
		FT	
		M	
		FT	
		M	

MODEL NUMBERS (for Frame & Load Cell)
 DR240 (24,000 lbs)
 DR120K (12,000 kgs)

MODEL NUMBER (for WIZARD 4000 Indicator)
 4000-1 1-Channel
 4000-2 2-Channel
 4000-3 3-Channel
 4000-4 4-Channel

WIZARD INDICATOR MODEL NO: _____

4-20mA OUTPUTS _____




RELAYS _____ DRY CONTACT / SOLID STATE
 N.O. / N.C.

OTHER OPTIONS: _____

NOTE: Use 5/8" x 1-1/2" (16mm x 38mm) Anchor Bolts

RECOMMENDATION: 12" (305mm) minimum pad be used for each foot. DO NOT PREPOUR ANCHOR BOLTS. Use frame as template to avoid binding.

WEIGHT: 2160 Lbs (980 kgs)
 (palletized for shipping)

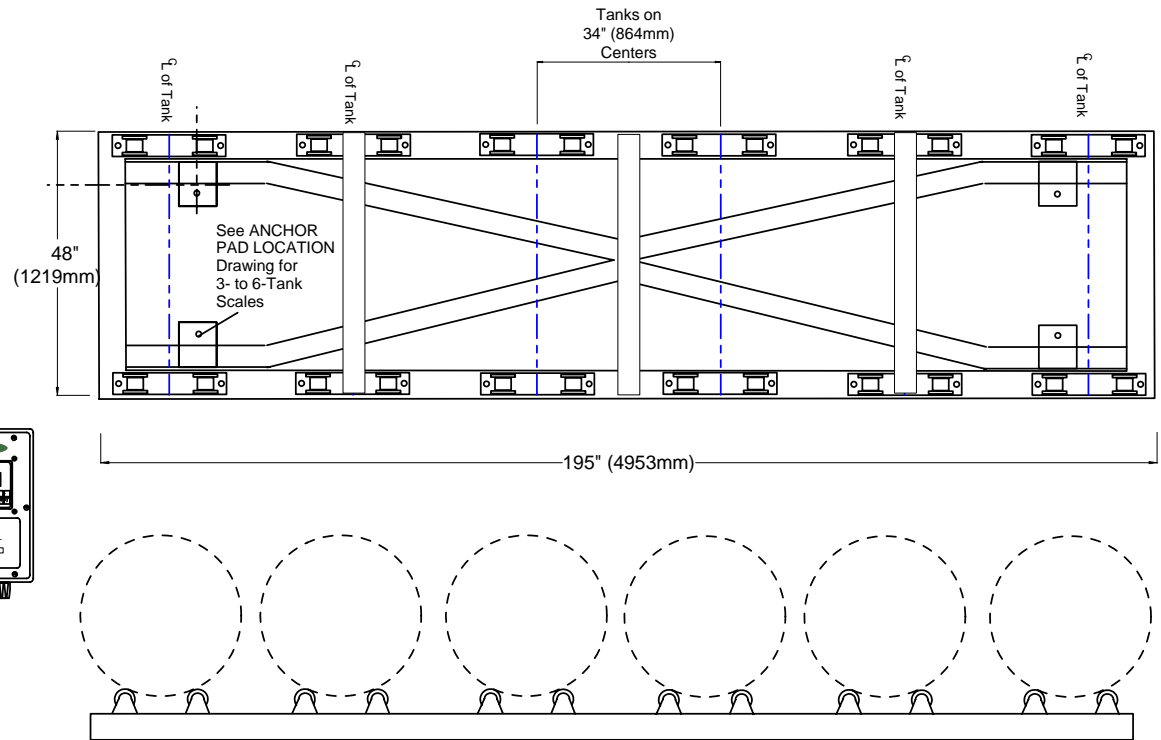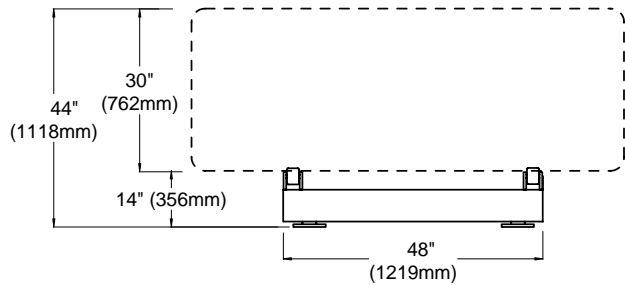

W.1.134



1150-D Burnett Ave, Concord, CA 94520 USA
 1-800-893-6723 US & Canada, Fax: 925-686-6713
 www.forceflow.com / info@forceflow.com

ELECTRONIC 6-TANK SCALE
CHLOR-SCALE with WIZARD INDICATOR
(24,000 lb. or 12,000 kg. Capacity)

File: T4/O&MTONELEC/WIZ6TANK.tcw (J23.pdf) (WEB: TON6WIZ.pdf)

Drawn by: SLP
 Date: 09/01/95
 Revised: 10/23/03
 Scale: NONE

Drawing Number
30289